


EASYCARE.

EasyCare Platinum Paint and Primer in One Exterior Flat Finish

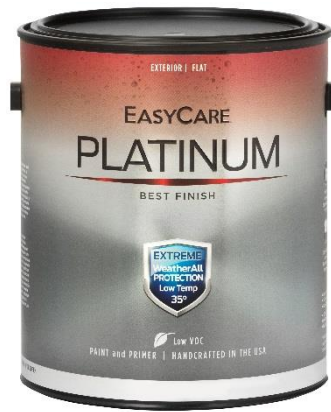

DESCRIPTION

Best quality exterior 100% acrylic latex flat finish house & trim paint with low temp applications and a Lifetime warranty when applied according to all label directions on a properly prepared surface.

• WAEF FORMULA ANALYSIS

- Resin Type-Acrylic Latex
- Sheen/Type Finish:
- 2-6 @60° / Flat
- Weight per Gallon = 10.6 lbs. \pm .2
- Percent Solids by Weight = 49.4 \pm .2%
- Percent Solids by volume = 37.0 \pm .2%
- Viscosity Range = 95-105 ku
- V.O.C. = Less than 50 g/l 0.84 lbs./gal.
- MPI Certification #10

PRODUCT FEATURES

- Durable one-coat coverage with exceptional hide
- 100% Acrylic low temp application 35°
- Superior fade resistance
- Mildew resistant coating
- High Hiding formula for excellent coverage
- Easy soap & water clean-up
- Lifetime warranty

COLORS & TINTING

Colors Available:

- WAEF-1 Jamestown Red
- WAEF-9 White
- WAEF-14 Black
- WAEF-17 Tudor Brown

Bases Available:

- WAEF-P Pastel Base
- WAEF-T Tint Base
- WAEF-D Deep Base
- WAEF-N Neutral Base

RECOMMENDED USE

Exterior new, weathered or previously painted surfaces such as masonry, stucco, concrete block, brick and concrete. May also be used on properly prepared wood, factory primed siding and cement board.

THINNING: Thin sparingly with water if necessary for spraying.

DRY TIME: Dries in 1-2 hours. Allow to dry overnight before recoating. High humidity or low temperature may increase dry time. After 2-4 weeks, cured paint may be cleaned with a mild, non-abrasive liquid detergent. Dry Paint film is mildew resistant.

COVERAGE: 350-400 sq.. per gallon depending on the porosity of the surface to be painted.

CLEAN UP & DISPOSAL: Wash tools with warm water and soap immediately after applying. Properly Dispose of all soiled rags. To recycle or properly dispose of paint in your community, call 1-800-CLEANUP (USA only)

STORAGE: Protect unused product from freezing.

APPLICATION METHOD

This paint can be used over latex or oil based paint. Intermix all containers for color uniformity. Stir thoroughly before and during use. Certain colors may require more than one coat. Do not apply over a surface that has not been properly prepared. Do not apply if rain or dew is expected within 24 hrs or if outside temperature could drop below 40°. Use product when surface and air temperature are between 35-90°. Do not apply in hot sun; follow shade around house. Do not over spread. Use a premium brush or pad applicator. If spray applied back brushing is recommended to assure adequate penetration into the substrate . For best performance; apply two coats on new surfaces after priming. Allow new masonry to cure at least 30 days before coating

SURFACE PREP

See "Surface Prep" section for recommendations