

EASYCARE

Interior/Exterior Floor & Utility Enamel

DESCRIPTION

A quality economical all purpose floor & utility enamel.

• VE FORMULA ANALYSIS

- Resin Type- Alkyd/Polysaccharide
- Sheen/Type Finish:
- 60+ at 60°/Gloss
- Weight per Gallon = 9.58
- Percent Solids by Weight = 57.0
- Percent Solids by Volume = 40.0
- Viscosity = 78-84 KU
- V.O.C. = Less than 375 g/L

RECOMMENDED USE

Covered exterior wood, interior wood, and interior concrete. Use on porches, basement floors, utility rooms and other surfaces on which a wear-resistant coating is needed.

THINNING: DO NOT THIN

DRY TIME: Dries overnight. Low temperature or high humidity may increase dry time. On garage floors allow paint to dry 48 hours before driving on paint. Shield areas under tires for first 2 weeks with corrugated cardboard.

COVERAGE: 350- 450 sq. ft. per gallon.

CLEAN UP: Use mineral spirits (paint thinner) to clean up.

Properly dispose of all soiled rags. To recycle or properly dispose of paint in your community, call 1-800-CLEANUP (USA only)

STORAGE: Do not expose this container to excessive heat. Close container after each use. Keep from freezing.

APPLICATION METHOD

Stir or mix paint before using and intermix all containers for color uniformity.

The dried film will become slippery when wet. The addition of a non-slip agent such as silica sand is recommended prior to application.


Apply as-is with brush, roller or pad painter. For spraying information contact your paint specialist.

Do not overspread.

Surface temperature must be above 40°F (5°C).

SURFACE PREP

- Remove dirt, dust, grease and oil residue, loose and peeling paint or rust.
- Glossy areas must be dulled by sanding.
- Spot coat worn or bare areas.
- Allow new concrete to age 90 days before painting. Acid etch all bare concrete to the roughness of 100 grit sandpaper (this may require several etchings) before painting.

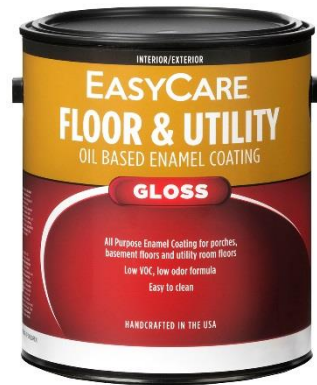

PRODUCT FEATURES

- Ideal for use on floors, railings & utility areas
- Abrasion resistant
- Easy to clean high-gloss finish

COLORS & TINTING

- VE-1 Light Gray
- VE-2 Battleship Gray
- VE-3 Brown
- VE-4 Tile Red
- VE-5 Green
- VE-9 White
- VE-14 Black